





AS 2519 S

- / astragal/meeting stile seal
- / wide compression range
- / extremely low compression force for feather-light operation
- / also suitable for retro-fit applications

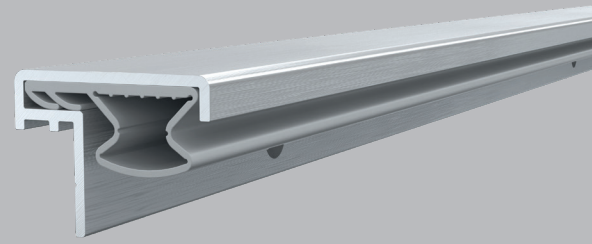


TECHNICAL DATA

Application	double-leaf timber and metal doors
Gasket material	silicone self-extinguishing
Carrier material	aluminum, anodized
Working temperature range	-40°C to +200°C



DIMENSIONS

Width x height	25 x 19 mm
Fitting tolerance range	0 - 4.5 mm
Standard lengths	2.100, 2.250, 2.500, 3.000 mm
Max. lengths	3.000 mm
Can be shortened by	any lengths



FIXING

Fixing	screw fixed to the meeting stile of double wing doors
--------	---

PERFORMANCE & CERTIFICATES

UL	UL 10C (R38166)
----	-----------------

COLORS (carrier, gasket)	ART.NO.	ACCESSORIES (incl. in delivery)
Silver anodized, grey	8-101	S020