




**PS 1010 P**  
**PS 1212 P**  
**PS 1515 P**

- / winged corner seal
- / equipped with two rows of durable self-adhesive backing tape
- / suitable for sound insulation and for smoke sealing
- / ensures soft closing of the door
- / also suitable for retro-fit applications

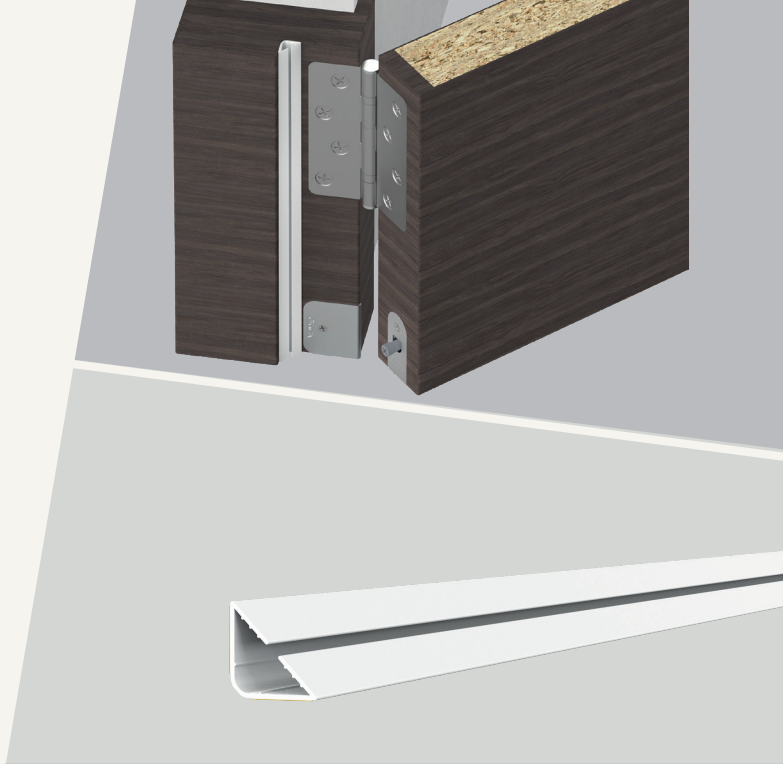

**TECHNICAL DATA**

Application	timber & metal door frames
Gasket material	rigid PVC base, flexible PVC fins
Working temperature range	-15°C to +60°C

**DIMENSIONS**

Standard lengths	2100, 2400, 3000 mm
------------------	---------------------

**FIXING**

Fixing	stuck to the door stop with self-adhesive backing tape
--------	--

**PERFORMANCE & CERTIFICATES**

UL	UL 10C (R38166)
Fire	EN1634-1*

COLORS/ART.NO.	PS 1010 P	PS 1212 P	PS 1515 P
Black	P160043	P160046	P160049
Dark brown	P160044	P160047	P160050
White	P160045	P160048	P160051

\*The test value may differ according to the EN 1634-1 test, as the complete door system must be checked.



	PS 1010 P	PS 1212 P	PS 1515 P
Fitting tolerance range	3 - 4 mm	3 - 4 mm	3 - 4 mm
Width x height	10 x 10 mm	12 x 12 mm	15 x 15 mm

